


PL 100

MPL 100


	n_1	i	n_2	M_2	kW_1	HP_1	RD
2800	9.98	281	720	22.0	30.0	0.96	
	12.89	217	720	17.1	23.2	0.96	
	15.47	181	855	16.9	23.0	0.96	
	15.72	178	720	14.0	19.0	0.96	
	19.98	140	810	12.4	16.8	0.96	
	20.49	137	675	10.1	13.7	0.96	
	24.36	115	810	10.2	13.8	0.96	
31.75	88	675	6.5	8.8	0.96		
1400	9.98	140	800	12.2	16.6	0.96	
	12.89	109	800	9.5	12.9	0.96	
	15.47	90	950	9.4	12.8	0.96	
	15.72	89	800	7.8	10.6	0.96	
	19.98	70	900	6.9	9.4	0.96	
	20.49	68	750	5.6	7.6	0.96	
	24.36	57	900	5.6	7.7	0.96	
31.75	44	750	3.6	4.9	0.96		
900	9.98	90	880	8.7	11.8	0.96	
	12.89	70	880	6.7	9.1	0.96	
	15.47	58	1045	6.6	9.0	0.96	
	15.72	57	880	5.5	7.5	0.96	
	19.98	45	990	4.9	6.6	0.96	
	20.49	44	825	4.0	5.4	0.96	
	24.36	37	990	4.0	5.4	0.96	
31.75	28	825	2.6	3.5	0.96		

	n_1	i	n_2	M_2	kW_1	HP_1	RD	sf	PAM
2800	9.98	281	359	11	15	0.96	2.01	38/300 - 28/250	
	12.89	217	464	11	15	0.96	1.55	38/300 - 28/250	
	15.47	178	557	11	15	0.96	1.54	38/300 - 28/250	
	15.72	137	566	11	15	0.96	1.27	38/300 - 28/250	
	19.98	181	720	11	15	0.96	1.13	38/300 - 28/250	
	20.49	140	604	9	12.5	0.96	1.12	38/300 - 28/250	
	24.36	115	718	9	12.5	0.96	1.13	38/300 - 28/250	
31.75	88	672	5.5	7.5	0.96	1.18	38/300 - 28/250		
1400	9.98	140	719	11	15	0.96	1.11	38/300 - 28/250	
	12.89	109	777	9.2	12.5	0.96	1.03	38/300 - 28/250	
	15.47	90	932	9.2	12.5	0.96	1.02	38/300 - 28/250	
	15.72	89	772	7.5	10	0.96	1.04	38/300 - 28/250	
	19.98	70	720	5.5	7.5	0.96	1.25	38/300 - 28/250	
	20.49	68	738	5.5	7.5	0.96	1.02	38/300 - 28/250	
	24.36	57	877	5.5	7.5	0.96	1.03	38/300 - 28/250	
31.75	44	624	3	4	0.96	1.20	38/300 - 28/250		
900	9.98	90	559	5.5	7.5	0.96	1.57	38/300 - 28/250	
	12.89	70	722	5.5	7.5	0.96	1.22	38/300 - 28/250	
	15.47	58	867	5.5	7.5	0.96	1.21	38/300 - 28/250	
	15.72	57	881	5.5	7.5	0.96	1.00	38/300 - 28/250	
	19.98	45	814	4	5.5	0.96	1.22	38/300 - 28/250	
	20.49	44	835	4	5.5	0.96	0.99	38/300 - 28/250	
	24.36	37	993	4	5.5	0.96	1.00	38/300 - 28/250	
31.75	28	712	2.2	3	0.96	1.16	38/300 - 28/250		

PL - PD

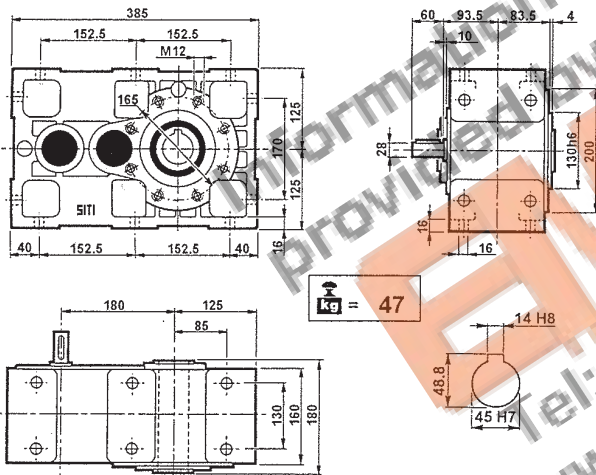

PL 100

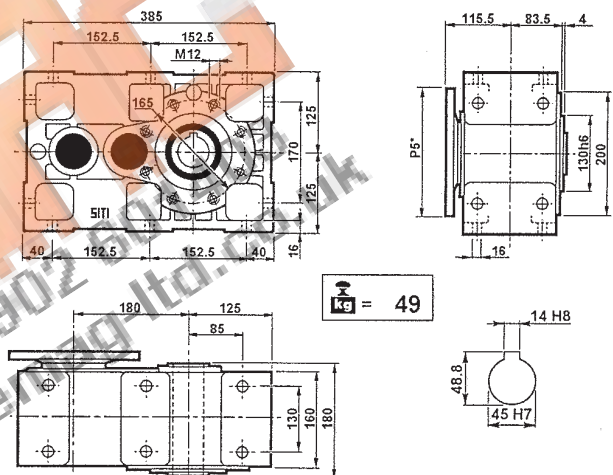

MPL 100

P_{5*}: Vedere i PAM per ogni singola versione
 P_{5*}: See PAM size for each single version
 P_{5*}: Siehe PAM Größe für jede Ausführung

P_{5*}: Voir les PAM pour chaque version simple
 P_{5*}: Consulte los PAM de cada versión por separado
 P_{5*}: Ver os PAM para cada versão

Carico radiale esterno ammissibile

Max. Allowable external radial load

Zulässige externe radiale Belastung

Charge radiale externe admissible


Carga radial externa admisible

Carga radial externa admissível

Albero veloce / Input shaft / Eingangswelle / Arbre grande vitesse / Eje rápido / Eixo de entrada							
1400 min ⁻¹		PL 100			PL 100/3		
		1400			1000		
Albero lento / Output shaft / Seitigatriebswelle / Arbre petite vitesse / Eje lento / Eixo de saída							
PL 100 - PL 100/3							
min ⁻¹	0°	30°	60°	90°	120°	150°	180°
20	13186	13632	14793	16577	18625	20227	20859
40	9972	10422	11491	13274	15327	17017	17646
60	8467	8822	9893	11674	13725	15415	16128
80	7397	7754	8822	10606	12657	14438	15060
100	6684	7041	8019	9795	11848	13607	14347
120	6147	6417	7485	9180	11319	13100	13813
140	5704	5954	6945	8518	10502	12155	12817
160	5346	5580	6509	7984	9844	11393	12013

Rotazione oraria
 Clockwise rotation
 Uhrzeigersinn
 Rotation dans le sens des
 aiguilles d'une montre
 Rotación en sentido horario
 Rotação horária

Rotazione antioraria
 Anticlockwise rotation
 Gegenurzeigersinn
 Rotation dans le sens contraire
 des aiguilles d'une montre
 Rotación en sentido antihorario
 Rotação anti-horária

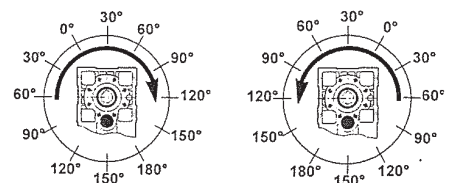

PL 100/3

MPL 100/3

n_1	i	n_2	M_2	kW_1	HP_1	RD
2800	21.40	131	810	12.1	16.4	0.92
	25.68	109	900	11.2	15.2	0.92
	33.16	84	882	8.5	11.5	0.92
	37.74	74	918	7.8	10.5	0.92
	40.44	69	882	7.0	9.5	0.92
	48.74	57	900	5.9	8.0	0.92
	52.70	53	720	4.4	5.9	0.92
	59.44	47	900	4.8	6.6	0.92
	72.91	38	918	4.0	5.5	0.92
	77.47	36	720	3.0	4.0	0.92
	88.91	31	918	3.3	4.5	0.92
115.88	24	720	2.0	2.7	0.92	

n_1	i	n_2	M_2	kW_1	HP_1	RD	sf	PAM
2800	21.40	131	369	5.5	7.5	0.92	2.19	28/250 - 24/200
	25.68	109	443	5.5	7.5	0.92	2.03	28/250 - 24/200
	33.16	84	572	5.5	7.5	0.92	1.54	28/250 - 24/200
	37.74	74	261	2.2	3	0.92	3.52	24/200 - 19/200
	40.44	69	698	5.5	7.5	0.92	1.26	28/250 - 24/200
	48.74	57	336	2.2	3	0.92	2.67	24/200 - 19/200
	52.70	53	661	4	5.5	0.92	1.09	28/250 - 24/200
	59.44	47	410	2.2	3	0.92	2.19	24/200 - 19/200
	72.91	38	343	1.5	2	0.92	2.68	14/160
	77.47	36	535	2.2	3	0.92	1.35	24/200 - 19/200
	88.91	31	418	1.5	2	0.92	2.19	14/160
115.88	24	545	1.5	2	0.92	1.32	14/160	






n_1	i	n_2	M_2	kW_1	HP_1	RD
1400	21.40	65	900	6.7	9.1	0.92
	25.68	55	1000	6.2	8.4	0.92
	33.16	42	980	4.7	6.4	0.92
	37.74	37	1020	4.3	5.9	0.92
	40.44	35	980	3.9	5.3	0.92
	48.74	29	1000	3.3	4.4	0.92
	52.70	27	800	2.4	3.3	0.92
	59.44	24	1000	2.7	3.6	0.92
	72.91	19	1020	2.2	3.0	0.92
	77.47	18	800	1.6	2.2	0.92
	88.91	16	1020	1.8	2.5	0.92
115.88	12	800	1.1	1.5	0.92	

n_1	i	n_2	M_2	kW_1	HP_1	RD	sf	PAM
1400	21.40	65	537	4	5.5	0.92	1.68	28/250 - 24/200
	25.68	55	645	4	5.5	0.92	1.55	28/250 - 24/200
	33.16	42	832	4	5.5	0.92	1.18	28/250 - 24/200
	37.74	37	426	1.8	2.5	0.92	2.39	24/200 - 19/200
	40.44	35	1015	4	5.5	0.92	0.97	28/250 - 24/200
	48.74	29	551	1.8	2.5	0.92	1.82	24/200 - 19/200
	52.70	27	728	2.2	3	0.92	1.10	28/250 - 24/200
	59.44	24	671	1.8	2.5	0.92	1.49	24/200 - 19/200
	72.91	19	343	0.75	1	0.92	2.97	14/160
	77.47	18	729	1.5	2	0.92	1.10	24/200 - 19/200
	88.91	16	418	0.75	1	0.92	2.44	14/160
115.88	12	545	0.75	1	0.92	1.47	14/160	



n_1	i	n_2	M_2	kW_1	HP_1	RD
900	21.40	42	990	4.7	6.4	0.92
	25.68	35	1100	4.4	6.0	0.92
	33.16	27	1078	3.3	4.5	0.92
	37.74	24	1122	3.0	4.1	0.92
	40.44	22	1078	2.7	3.7	0.92
	48.74	18	1100	2.3	3.1	0.92
	52.70	17	880	1.7	2.3	0.92
	59.44	15	1100	1.9	2.6	0.92
	72.91	12	1122	1.6	2.1	0.92
	77.47	12	880	1.2	1.6	0.92
	88.91	10	1122	1.3	1.8	0.92
115.88	8	880	0.8	1.1	0.92	

n_1	i	n_2	M_2	kW_1	HP_1	RD	sf	PAM
900	21.40	42	460	2.2	3	0.92	2.15	28/250 - 24/200
	25.68	35	552	2.2	3	0.92	1.99	28/250 - 24/200
	33.16	27	712	2.2	3	0.92	1.51	28/250 - 24/200
	37.74	24	405	1.1	1.5	0.92	2.77	24/200 - 19/200
	40.44	22	869	2.2	3	0.92	1.24	28/250 - 24/200
	48.74	18	523	1.1	1.5	0.92	2.10	24/200 - 19/200
	52.70	17	926	1.8	2.5	0.92	0.95	28/250 - 24/200
	59.44	15	638	1.1	1.5	0.92	1.72	24/200 - 19/200
	72.91	12	391	0.55	0.75	0.92	2.87	14/160
	77.47	12	832	1.1	1.5	0.92	1.06	24/200 - 19/200
	88.91	10	477	0.55	0.75	0.92	2.35	14/160
115.88	8	622	0.55	0.75	0.92	1.41	14/160	


PL - PD



kg = 52



kg = 54



PL 100/3

MPL 100/3

P_{5*}: Vedere i PAM per ogni singola versione
 P_{5*}: See PAM size for each single version
 P_{5*}: Siehe PAM Größe für jede Ausführung

P_{5*}: Voir les PAM pour chaque version simple
 P_{5*}: Consulte los PAM de cada versión por separado
 P_{5*}: Ver os PAM para cada versão